

TRANSMITTAL LETTER TO THE UNITED STATES
 DESIGNATED/ELECTED OFFICE (DO/EO/US)
 CONCERNING A FILING UNDER 35 U.S.C. 371

Attorney's Docket Number

01165.0798

U.S. Application No.

09/673750

International Application. No.
 PCT/JP99/02189

International Filing Date
 April 23, 1999

Priority Date Claimed
 April 23, 1998

Title of Invention: ROTOR OF SMALL-SIZED MOTOR

Applicants For DO/EO/US: 1) Junji SATO, 2) Eikichi SASHIDA, 3) Hideharu MIYAUCHI,
 4) Yousuke SAKAKIBARA, 5) Hiroshi IKEDA and 6) Eigo HASHIMOTO

Applicants herewith submit to the United States Designated/Elected Office (DO/EO/US)
 the following items and other information:

1. [X] This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. [] This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. [] This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. [X] A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. [X] A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. [] is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. [X] has been transmitted by the International Bureau.
 - c. [] is not required, as the application was filed in the United States Receiving Office (RO/US).
6. [X] A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. [X] Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. [] are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. [] have been transmitted by the International Bureau.
 - c. [] have not been made; however, the time limit for making such amendments has NOT expired.
 - d. [X] have not been made and will not be made.
8. [] A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. [X] An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. [] A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. [X] An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. [X] An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. [] A FIRST preliminary amendment.
14. [] A SECOND or SUBSEQUENT preliminary amendment.
15. [] A substitute specification.
16. [X] Other items or information:
 - a. [] Verified Small Entity Statement.
 - b. [] Copy of Notification of Missing Requirements.
 - c. [X] Copy of Cover Page of WIPO Publication(1 sheet).

09/673750

PCT/JP99/02189

01165.0798

17. [X] The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)-(5)):

Search Report has been prepared by the EPO or JPO.....\$860.00

International preliminary examination fee paid to

USPTO (37 CFR 1.482).....\$690.00

No international preliminary examination fee paid to

USPTO (37 CFR 1.482) but international search fee

paid to USPTO (37 CFR 1.445(a)(2)).....\$760.00

Neither international preliminary examination fee

(37 CFR 1.482) nor international search fee

(37 CFR 1.445(a)(2)) paid to USPTO.....\$1,000.00

International preliminary examination fee paid to USPTO

(37 CFR 1.482) and all claims satisfied provisions

of PCT Article 33(1)-(4).....\$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS

\$860.00

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than

[] 20 [] 30 months from the earliest claimed priority date

(37 CFR 1.492(e)).

\$

Claims	Number Filed	Number Extra	Rate	
Total Claims	28 -20=	8	X \$18.00	\$144.00
Independent Claims	3 - 3=	0	X \$80.00	\$
Multiple dependent claim(s) (if applicable)			+\$270.00	\$
TOTAL OF ABOVE CALCULATIONS =				\$1004.00

Reduction by 1/2 for filing by small entity, if applicable. Verified

Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)

\$

SUBTOTAL = \$1004.00

Processing fee of \$130.00 for furnishing the English translation later

than [] 20 [] 30 months from the earliest claimed priority date

(37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE = \$1004.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The

assignment must be accompanied by an appropriate cover sheet

(37 CFR 3.28, 3.31). \$40.00 per property + \$ 40.00

TOTAL FEES ENCLOSED = \$1044.00

Amount to be

refunded \$

charged \$

a. [X] A check in the amount of **\$1044.00** to cover the above fees is enclosed.

b. [] Please charge my Deposit Account No. _____ in the amount of \$_____

to cover the above fees. A duplicate copy of this sheet is enclosed.

c. [X] The Commissioner is hereby authorized to charge any additional fees

which may be required, or credit any overpayment to Deposit Account

No. 06-0916. A duplicate copy of this sheet is enclosed.

The Commissioner is hereby authorized to charge any other fees due under 37 C.F.R. §1.16 or §1.17 during the pendency of this application to our Deposit Account No. 06-0916.

SEND ALL CORRESPONDENCE TO:

Finnegan, Henderson, Farabow

Garrett & Dunner, L.L.P.

1300 I Street, N.W.

Washington, D.C. 20005-3315

EFC/FPD/sci

Ernest F. Chapman

Reg. No. 25,961

Submitted: October 20, 2000

SPECIFICATION

ROTOR OF SMALL-SIZED MOTOR

5 TECHNICAL FIELD

The present invention relates generally to a miniature drive unit and, more particularly, to a rotor for a miniature electric motor incorporated in, e.g., an electronic clock or watch.

10

BACKGROUND ARTS

An electronic clock or watch, such as a quartz watch, is provided with a miniature precision electric motor as a drive unit. The electric motor, generally structured as a stepping motor, used in the electronic clock includes a rotor with an annular or cylindrical permanent magnet and a stator with a coil. The rotor is also provided with a shaft concentric with and secured to the cylindrical permanent magnet, and a driving toothed wheel generally integrally formed on the shaft.

20

In the rotor of a conventional miniature electric motor incorporated in, e.g., an electronic clock, a rotor shaft is generally fixed in a center through hole formed in a rotor magnet by using a bonding material, such as an adhesive or solder, or by tightly press-fitting the shaft into the through hole. In this fixing operation, it is required to maintain a concentricity or alignment between the shaft and the annular or cylindrical rotor magnet, and to ensure a large and stable fixing force for securing the shaft in a predetermined proper position in the magnet. When the rotor shaft is tightly press-fitted into the through hole of the rotor magnet, it is also required to prevent the magnet from being broken or cracked due to the stress concentration, in a region adjacent to the through hole of the magnet, during the pressure-fitting operation of the shaft and for a long time after the rotor is completely assembled.

25

30

35

One example of the rotor of the conventional miniature motor in the electronic clock is disclosed in Japanese Unexamined Utility Model Publication (Kokai) No. 54-71610 (JP-U-54-71610). This motor rotor includes
5 a shaft with a toothed wheel and a cylindrical permanent magnet with a center through hole for fixing the shaft. The rotor shaft is provided with a deformed profile such as a prism, and is tightly press-fitted into the cylindrical center through hole of the rotor magnet. In
10 this structure, the shaft is in a local contact with the inner cylindrical surface of the magnet in the through hole at a part of the outer surface of the shaft, over the entire axial length of the through hole. This local contact of the shaft with the magnet serves to distribute
15 a stress concentration into some local regions adjacent to the through hole of the magnet, which can prevent the magnet from being broken or cracked and also can ensure a large fixing force.

The annular or cylindrical permanent magnet of the
20 conventional miniature motor rotor is generally formed from a sintered magnet made from rare-earth elements. A sintered permanent magnet normally has high magnetic performance, but tends to increase a production cost of a small, annular or cylindrical magnet structure. On the
25 other hand, a permanent magnet with a simply molded structure, generally referred to as "a bonded magnet", is known to be capable of reducing such a production cost. However, when the annular or cylindrical magnet of the miniature motor rotor is formed from a bonded magnet, the
30 mechanical strength of the rotor magnet is reduced in comparison with that of the sintered rotor magnet. Therefore, in this case, even if a rotor shaft has a structure as being described in JP-U-54-71610, the distributed stress concentration may cause the bonded
35 rotor magnet to be broken or cracked during the press-fitting operation of the shaft or after the rotor is completed.

JP-U-54-71610 also discloses a bush interposed between the rotor shaft and the rotor magnet in the through hole, the bush being used to prevent the magnet from being broken or cracked. Such a bush is also disclosed in Japanese Unexamined Utility Model Publication (Kokai) No. 56-71078 (JP-U-56-71078). However, the additional use of the bush increases the number of parts of the motor rotor, and may deteriorate the productivity of the latter and increase the production cost thereof.

When the rotor shaft is fixed to the through hole of the rotor magnet by a bonding material such as an adhesive or solder, the shaft can be loosely fitted into the through hole, whereby the problems of breaking or cracking the magnet can be eliminated and relatively large fixing force can be established. However, a clearance between the shaft and the magnet in the through hole is normally very small in the order of several μm , so that the bonding material may overflow from the through hole as the shaft is inserted into the latter. Therefore, in this solution, it is necessary to carefully and precisely apply the bonding material to the very small clearance between the shaft and the magnet so as to ensure the large and stable fixing force, which may prevent mass production of the miniature motor rotor.

DISCLOSURE OF THE INVENTION

It is therefore an object of the present invention to provide a rotor, used in a miniature electric motor, which can be produced with a high structural reliability, a high yield and a relatively low cost.

It is another object of the present invention to provide a rotor including an annular or cylindrical magnet and a shaft fixed to the magnet, which can prevent the magnet from being broken or cracked due to the shaft, and can ensure a large and stable fixing force for securing the shaft in a predetermined position on the

magnet.

It is further object of the present invention to provide a fixing structure, for fixing a shaft to an annular or cylindrical magnet, which can be suitably adopted for a process for producing a rotor having a relatively fragile magnet, such as a simply molded or bonded magnet.

In accordance with the present invention, there is provided a rotor, for an electric motor, comprising a magnet having a rotation axis, the magnet being provided with a through hole extending coaxially with the rotation axis; a shaft fixed concentrically to the magnet, the shaft including a portion fitted in the through hole, the portion having an axial interengagement length shorter than an axial length of the through hole; and reinforcing means provided at least inside the through hole for ensuring a fixing force to securely hold the shaft in a predetermined position in the magnet.

In a preferred aspect of the invention, the magnet comprises an annular magnet material and a coating formed on a surface of the magnet material and arranged at least inside the through hole, and the reinforcing means comprises the coating, the portion of the shaft being engaged with the coating in a face-to-face manner.

In this arrangement, it is preferred that the coating is made of a metal plating.

The metal plating may be an electroless plating.

Also, the metal plating may include at least one of a Ni-P electroless plating, a Ni-B electroless plating and a Ni-P-W electroless plating.

It is preferred that the metal plating has a thickness of at least 10 μm .

Alternatively, the metal plating may include an electroless plating base layer and an electroplating top layer.

In this arrangement, the electroplating top layer may be a Ni electroplating.

The electroless plating base layer may have a thickness in a range of 0.5 μm to 2.0 μm .

Also, the electroplating top layer may have a thickness of at least 3.0 μm .

5 Preferably, the magnet material is made of a bonded magnet material.

10 In this arrangement, a dimensional relationship between the axial interengagement length of the portion of the shaft and the axial length of the through hole may be defined as $T/5 \leq t \leq T/2$, in which "T" is the through hole axial length and "t" is the axial interengagement length.

15 Also, it is advantageous that, in an arrangement that the portion of the shaft is tightly press-fitted in the through hole of the magnet, an interference of the portion in the through hole is in a range of 5 μm to 30 μm .

20 Preferably, the bonded magnet material is vacuum-impregnated with a bonding agent or filler.

20 In another preferred aspect of the invention, the reinforcing means comprises an adhesive filled in a clearance defined between a remainder of the shaft other than the portion and the magnet inside the through hole.

25 In this arrangement, a dimensional relationship between the axial interengagement length of the portion of the shaft and the axial length of the through hole may be defined as $T/5 \leq t \leq 4T/5$, in which "T" is the through hole axial length and "t" is the axial interengagement length.

30 The adhesive may be a thermosetting epoxy resin.

35 The magnet may comprise an annular magnet material and a coating formed on a surface of the magnet material at least inside the through hole, and the reinforcing means may further comprise the coating, the portion of the shaft being engaged with the coating in a face-to-

face manner.

In this arrangement, the coating may be made of a metal plating.

Alternatively, the coating may be made of an organic
5 substance layer.

In this arrangement, it is preferred that the magnet material is made of a bonded magnet material.

The magnet may contain rare-earth elements.

In accordance with the present invention, there is
10 also provided a method of producing a rotor for an electric motor, comprising the steps of (a) forming a coating on a surface of an annular magnet material and thereby providing a magnet having a rotation axis and a through hole extending coaxially with the rotation axis,
15 the coating being arranged at least inside the through hole; (b) providing a shaft including a portion capable of being fitted in the through hole; and (c) inserting the shaft into the through hole of the magnet and tightly press-fitting the portion of the shaft in the through
20 hole, until an axial interengagement length of the portion, shorter than an axial length of the through hole, is obtained.

In a preferred aspect of the invention, the magnet material may be made of a bonded magnet material, the
25 coating may be a metal plating, and the method may further include a step of vacuum-impregnating the bonded magnet material with an adhesive before the step of forming the coating.

An interference of the portion in the through hole
30 may be adjusted by changing a thickness of the coating.

The present invention further provides a method of producing a rotor, for an electric motor, comprising the steps of (a) providing a magnet having a rotation axis and a through hole extending coaxially with the rotation
35 axis; (b) providing a shaft including a first portion capable of being fitted in the through hole and a second portion axially adjacent to the first portion for

defining a clearance inside the through hole; (c) inserting the shaft into the through hole of the magnet and fitting the first portion of the shaft in the through hole, until an axial interengagement length of the first portion, shorter than an axial length of the through hole, is obtained; and (d) filling an adhesive in the clearance inside the through hole.

In a preferred aspect of the invention, the adhesive may be vacuum-impregnated into the clearance.

The magnet may be made of an annular bonded magnet material, and the method may further include a step of forming a coating on a surface of the bonded magnet material before the step of inserting the shaft.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features, and advantages of the present invention will become more apparent from the following description of preferred embodiments in connection with the accompanying drawings, in which:

Fig. 1 is an exploded vertical view of a first embodiment of a rotor according to the present invention;

Fig. 2 is a vertical sectional view showing the assembled state of the rotor of Fig. 1;

Fig. 3 is a vertical sectional view of a second embodiment of a rotor according to the present invention, showing the assembled state thereof;

Fig. 4 is an exploded vertical sectional view of a third embodiment of a rotor according to the present invention;

Fig. 5 is a vertical sectional view showing the assembled state of the rotor of Fig. 4; and

Fig. 6 is a vertical sectional view of a fourth embodiment of a rotor according to the present invention, showing the assembled state thereof.

BEST MODE FOR CARRYING OUT THE INVENTION

Referring now to the drawings, in which same or similar components are denoted by common reference numerals, Figs. 1 and 2 show a rotor 10 of a miniature electric motor, according to a first embodiment of the present invention. The rotor 10 of this embodiment may be used in a miniature precise electric motor incorporated in an electronic clock or watch.

The rotor 10 includes a magnet 12 having a rotation axis 14, and a shaft 16 fixed to and concentrically with the magnet 12. The magnet 12 is structured from an annular or cylindrical permanent magnet material 18, and is provided with a center cylindrical through hole 20 extending coaxially with the rotation axis 14. The magnet 12 is also provided with a coating 22 formed on an entire surface of the permanent magnet material 18. The coating 22 is made of a metal plating with a predetermined thickness, and defines the inner cylindrical surface of the magnet 12 inside the through hole 20 having a diameter " D_1 ".

The shaft 16 has a generally cylindrical shape with a stepped outer surface, and includes an intermediate portion 24 with a diameter " d_1 ". The diameter d_1 is selected so that the intermediate portion 24 is received and tightly press-fitted into the through hole 20 of the magnet 12 (i.e., $d_1 > D_1$). The shaft 16 also includes a first end portion 26 coaxially adjacent to and extending from the intermediate portion 24, a toothed wheel 28 coaxially adjacent to and extending from the intermediate portion 24 and opposite to the first end portion 26, and a stepped second end portion 30 coaxially adjacent to and extending from the toothed wheel 28 and opposite to the intermediate portion 24. The first end portion 26 has a diameter smaller than the diameter D_1 of the through hole 20, and the toothed wheel 28 has a diameter larger than the diameter d_1 of the intermediate portion 24. The shaft 16 preferably has a one-piece or monolithic structure and is made of a metal.

The intermediate portion 24 and the first end portion 26 of the shaft 16 are inserted into the through hole 20, and the shaft 16 is concentrically fixed at a predetermined proper position on the magnet 12, due to the interengagement of the outer cylindrical surface of the intermediate portion 24 with the inner cylindrical surface of the magnet 12 inside the through hole 20. In this respect, the intermediate portion 24 is dimensioned so as to define an axial interengagement length " t_1 " shorter than an entire axial length " T_1 " of the through hole 20. When the shaft 16 is in the proper position on the magnet 12, the first end portion 26 projects from one side of the magnet 12, and the toothed wheel 28 and the second end portion 30 project from another side of the magnet 12.

The rotor 10 also includes reinforcing means provided at least inside the through hole 20 of the magnet 12, for ensuring fixing force to securely hold the shaft 16 in the predetermined position on the magnet 12. In this embodiment, the reinforcing means is structured by the above-mentioned coating 22 made of a metal plating. The intermediate portion 24 of the shaft 16 is engaged with the coating 22 in a face-to-face manner and tightly press-fitted with the latter inside the through hole 20.

In this structure, the shaft 16 is in contact with a part of the inner cylindrical surface of the magnet 12 in the through hole 20 at the outer cylindrical surface of the intermediate portion 24 of the shaft 16. Further, the magnet 12 is reinforced by the coating 22, with regard to the mechanical strength and toughness of the magnet 12. This partial contact of the shaft 16 with the magnet 12 cooperates with the reinforcement of the magnet 12 by the coating 22, so as to prevent the magnet 12 from being broken or cracked, during the press-fitting operation of the intermediate portion 24 into the through hole 20 and after the rotor 10 is completely

assembled, and also to ensure a relatively large and stable fixing force. No additional part, such as a bush or an adhesive, is used to assemble the rotor 10, so that the rotor 10 can be produced with a high structural reliability, a high yield and a relatively low cost.

By suitably adjusting the axial interengagement length t_1 of the intermediate portion 24 of the shaft 16 with relation to the entire axial length T_1 of the through hole 20, as well as an interference " d_1 minus D_1 " between the intermediate portion 24 and the magnet 12 in the through hole 20, the desired fixing force for securing the shaft 16 can be obtained while eliminating the breaking or cracking of the magnet 12, even if the magnet 12 is made of a relatively fragile magnet material 18, such as a simply molded or bonded magnet. The bonded magnet can further reduce the production cost of the miniature motor rotor 10 including the annular or cylindrical magnet 12, in comparison with the sintered magnet.

It should be noted that the desired fixing force is determined in consideration of the productivity and the structural reliability of the rotor 10, and is, for example, 0.2 Kgf in this embodiment. Also, it should be noted that the intermediate portion 24 of the shaft 16 may have a deformed profile such as a prism, as being described in the aforementioned JP-U-54-71610.

In the rotor 10 of the first embodiment, the magnet 12 may be structured by applying an electroless metal plating, as the coating 22, onto the entire surface of the cylindrical permanent magnet material 18. The permanent magnet material 18 may be made of a rare-earth bonded magnet, such as a SmCo (samarium/cobalt) type magnet, a NdFeB (neodymium/iron/boron) type magnet or a SmFeN (samarium/iron/nitrogen) type magnet. The electroless plating 22 may be of at least one of a Ni(nickel)-P(phosphorus) electroless plating, a Ni-B(boron) electroless plating and a Ni-P-W(tungsten)

electroless plating.

Preferably, the permanent magnet material 18 made of a bonded magnet is vacuum-impregnated with a bonding agent or filler, so as to further improve the mechanical strength of the magnet 12. The bonded magnet is generally molded from magnetic powder with a binder being mixed therein, and therefore includes many air cavities in the molded structure. The bonding agent or filler, vacuum-impregnated to the molded magnet material 18, fills the cavities so as to enhance the mechanical breaking strength of the permanent magnet material 18, and to prevent the magnet 12 from being broken or cracked, during the press-fitting operation of the portion 24 into the through hole 20 and after the rotor 10 is completed, while cooperating with the electroless plating 22.

The bonding agent or filler may preferably be selected from liquid resinous materials capable of providing a relatively high adhesion force, low cost and easy handling, such as, an epoxy resin, a phenol resin, a thermosetting adhesive such as a polyurethane, or an anaerobic adhesive. An adhesive having good permeability and low viscosity may also be suitably selected from the viewpoint of the vacuum-impregnating process.

The electroless plating as the coating 22 serves to enhance the mechanical strength of the permanent magnet material 18 made of the bonded magnet. The electroless plating 22 also serves to prevent the magnetic powder from falling from the molded magnet material 18, during the press-fitting operation of the shaft 16. Preferably, the electroless plating 22 has a thickness of at least 10 μm . If the thickness of the electroless plating 22 is less than 10 μm , the improvement of the mechanical strength of the magnet 12 would be insufficient to prevent the breaking or cracking of the magnet 12. In view of ensuring a coating thickness

control in a process for producing the electroless plating 22, it is preferred that the thickness of the electroless plating 22 is at most 30 μm .

5 In the rotor 10, it is preferred that a dimensional relationship between the axial interengagement length t_1 of the intermediate portion 24 of the shaft 16 and the entire axial length T_1 of the through hole 20 of the magnet 12 is defined as $T_1/5 \leq t_1 \leq T_1/2$. If the axial interengagement length t_1 is less than $T_1/5$, the shaft 16
10 would be easily tilted in the through hole 20, which results in a misalignment of the shaft 16, regardless of the dimension of the interference between the magnet 12 and the shaft 16. If the axial interengagement length t_1 is more than $T_1/2$, the possibility of breaking or
15 cracking the magnet 12 would increase.

It is also preferred, in the rotor 10, that the interference " $d_1 - (\text{minus}) D_1$ " between the intermediate portion 24 of the shaft 16 and the magnet 12 in the through hole 20 is in a range of 5 μm to 30 μm . If the
20 interference " $d_1 - D_1$ " is less than 5 μm , the desired fixing force (e.g., 0.2 Kgf) for the shaft 16 on the magnet 12 would not be obtained. If the interference " $d_1 - D_1$ " is more than 30 μm , the possibility of breaking or cracking the magnet 12 would increase, even when the
25 axial interengagement length t_1 is at most $T_1/2$.

Fig. 3 shows a rotor 40 of a miniature electric motor, according to a second embodiment of the present invention. The rotor 40 of this embodiment is provided with a structure essentially similar to the structure of
30 the above-mentioned rotor 10, except that a coating 42, as reinforcing means, is structured as a double-layered metal plating. Therefore, same or similar components are denoted by common reference numerals, and the detailed description thereof are not repeated.

35 The coating 42 in the rotor 40, made of a double-layered metal plating, includes an electroless plating

base layer 44 and an electroplating top layer 46. Accordingly, in the rotor 40, the electroplating top layer 46 of the coating 42 defines the inner cylindrical surface of the magnet 12 inside the through hole 20 which has a diameter D_2 smaller than the diameter d_2 of the intermediate portion 24 of the shaft 16. This double-layered structure of the coating 42 serves to reduce the entire thickness of the coating 42 in comparison with the single layer coating 22 in the rotor 10, without deteriorating the reinforcement effect thereof, since the electroplating top layer 46 has in itself a higher mechanical strength than an electroless plating having the same thickness and can be securely attached to the surface of the electroless plating base layer 44.

The electroless plating base layer 44 may be of at least one of a Ni-P electroless plating, a Ni-B electroless plating and a Ni-P-W electroless plating. The electroplating top layer 46 may be of a Ni plating. The inventors of the present invention have found that every one of the Ni-P electroless plating, the Ni-B electroless plating, the Ni-P-W electroless plating and the Ni electroplating has relatively high rigidity and high Young's modulus, and thus can more effectively improve the breaking strength of the magnet 12 and can obtain the higher stable fixing force for the shaft 16, in comparison with the other metal plating made of, such as Cu(copper), Pd(palladium), Au(gold), Sn(tin), solder(Pb/Sn type), etc., every one of which has relatively high spreading properties and relatively low rigidity. Preferably, the electroless plating base layer 44 has a thickness in a range of 0.5 μm to 2.0 μm . Also, it is preferred that the electroplating top layer 46 has a thickness of at least 3.0 μm .

The constitution and the characteristic effect of the above embodiments of the present invention will be more clearly described below, with reference to the

results of some experiments for the validity of the invention.

Experiment 1

5 In the rotor 10 shown in Figs. 1 and 2, the permanent magnet material 18 was made of an anisotropic bonded magnet of rare-earth elements formed from a $\text{Sm}_2\text{Co}_{17}$ type magnetic powder and an epoxy resin binder, the shaft 16 was made of a carbon steel "JIS SK4", and the coating 22 was formed as a Ni-P electroless plating. The shaft 16 had a monolithic or integral body including the toothed wheel 28. The annular or cylindrical permanent magnet material 18 was dimensioned as 1250 μm (outer diameter) \times 350 μm (inner diameter) \times 460 μm (axial length). The bonded magnet used for the permanent magnet material 18 was produced through a compression molding process in a magnetic field, from a compound including the $\text{Sm}_2\text{Co}_{17}$ type magnetic powder having an average particle diameter of 10 μm (measured by a Fischer's method) and 3 weight% of epoxy resin binder. This bonded magnet included air cavities to 20 to 40 volume%.

Then, the magnet material 18 was vacuum-impregnated with a thermosetting liquid epoxy resin to fill the air cavities, so as to enhance the mechanical strength and the toughness of the permanent magnet material 18. To further improve the mechanical strength, Ni-P electroless plating 22 having a uniform thickness of 20 μm was formed on the entire surface of the permanent magnet material 18 through an electroless plating process. Thereby, the magnet 12 was completed, in which the inner diameter D_1 inside the through hole 20 was 310 μm and the entire axial length T_1 of the through hole 20 was 500 μm . The magnet 12 thus formed had an extreme breaking strength against a compression load in a radial direction, which was ten times, and more, that of the permanent magnet material 18. Note, if the electroless plating 22 tends

to be provided with uneven thickness, it may be useful that the electroless plating 22 is formed so as to have a minimum thickness $20\text{ }\mu\text{m}$, and that the through hole 20 is finished, in such a plated magnet blank, by using a
5 $310\text{ }\mu\text{m}$ diameter drill.

Six types of the shaft 16 were provided, which respectively included the intermediate portions 24 having the diameter d_1 of $312\text{ }\mu\text{m}$, $315\text{ }\mu\text{m}$, $320\text{ }\mu\text{m}$, $330\text{ }\mu\text{m}$, $340\text{ }\mu\text{m}$ and $345\text{ }\mu\text{m}$. Then, the shafts 16 were respectively
10 inserted into the magnet 12 thus completed, and the intermediate portions 24 of the shafts 16 were respectively press-fitted into the through hole 20, until the respective axial interengagement lengths t_1 of $10\text{ }\mu\text{m}$, $30\text{ }\mu\text{m}$, $50\text{ }\mu\text{m}$, $100\text{ }\mu\text{m}$, $200\text{ }\mu\text{m}$, $250\text{ }\mu\text{m}$ and $300\text{ }\mu\text{m}$ were
15 obtained. In this way, the six types of the shafts 16 were respectively secured to the magnet 12, under the deformation of the magnet 12 especially in the wall of the electroless plating 22 inside the through hole 20, in different engagement conditions (the interference
20 " $d_1 - D_1$ "; the axial interengagement length t_1).

For the respective types of rotors 10 thus provided, the fixing force (Kgf) for securing the respective shafts 16 (Table 1), the respective breaking states in the magnet 12 (Table 2) and the tilt or misalignment of
25 the respective shafts 16 (Table 3) were estimated. The fixing force was determined by axially pushing the first end portion 26 of the shaft 16 secured in the through hole 20 of the magnet 12 and measuring the force required to shift the shaft 16 in the through hole 20 (or to pull
30 out the shaft from the through hole 20). The results of these estimations are shown in the Tables 1 to 3.

Table 1 (Fixing Force: Kgf)

$d_1 - D_1$ (μm) t_1 (μm)	2	5	10	20	30	35
10	0.01	0.03	0.09	0.54	0.95	2.05
30	0.05	0.07	0.10	0.85	1.56	-
50	0.08	0.22	0.90	1.40	1.90	-
100	0.12	<u>0.35</u>	<u>1.25</u>	<u>2.32</u>	<u>2.81</u>	-
200	0.14	<u>0.59</u>	<u>1.50</u>	<u>2.70</u>	<u>3.40</u>	-
250	0.18	<u>0.81</u>	<u>2.32</u>	<u>2.72</u>	<u>3.90</u>	-
300	0.01	0.02	-	-	-	-

(-: less than 0.01 Kgf)

5

Table 2 (Breaking of Magnet)

$d_1 - D_1$ (μm) t_1 (μm)	2	5	10	20	30	35
10	○	○	○	○	○	○
30	○	○	○	○	○	×
50	○	○	○	○	○	×
100	○	<u>○</u>	<u>○</u>	<u>○</u>	<u>○</u>	×
200	○	<u>○</u>	<u>○</u>	<u>○</u>	<u>○</u>	×
250	○	<u>○</u>	<u>○</u>	<u>○</u>	<u>○</u>	×
300	×	×	×	×	×	×

(○: unbroken ×: broken)

Table 3 (Misalignment of Shaft)

$d_1 - D_1$ (μm) \ t_1 (μm)	2	5	10	20	30	35
10	×	×	×	×	×	×
30	×	×	×	×	×	—
50	×	×	×	×	×	—
100	○	○	○	○	○	—
200	○	○	○	○	○	—
250	○	○	○	○	○	—
300	—	—	—	—	—	—

(○: aligned ×: misaligned —: unestimated (broken))

As will be understood from the results of the above estimations, when the interference $d_1 - D_1$ between the intermediate portion 24 of the shaft 16 and the magnet 12 inside the through hole 20 was less than $5 \mu\text{m}$, the fixing force of 0.2 Kgf, which is generally required for the rotor of a miniature electric motor incorporated in an electronic clock or watch, could not be obtained. When the interference exceeded $30 \mu\text{m}$, the magnet 12 was broken in most of cases of the axial interengagement lengths t_1 , during the press-fitting operation of the shaft 16 into the through hole 20. When the axial interengagement length t_1 was less than $100 \mu\text{m}$, the shaft 16 was tilted or misaligned in the through hole 20. When the axial interengagement length t_1 exceeded $250 \mu\text{m}$, the magnet 12 was broken in every case of the interferences $d_1 - D_1$, during the press-fitting operation of the shaft 16. Consequently, it is required to select the axial interengagement length t_1 in the range of $100 \mu\text{m}$ to

250 μm (i.e., $T_1/5 \leq t_1 \leq T_1/2$), and also to select the interference $d_1 - D_1$ in the range of 5 μm to 30 μm .

As is apparent from the above, the rotors 10, having the estimated results underlined in the respective tables 1 to 3, are adoptable for the invention, wherein the magnet 12 is prevented from being broken or cracked due to the shaft 16, wherein the desired fixing force of at least 0.2 Kgf is obtained, and wherein the tilt or misalignment of the shaft 16 is eliminated. By selecting any of the underlined sample rotors 10, the rotor 10 can be assembled in a mass-production by the simple press-fitting process of the shaft 16 into the through hole 20, even when the dimensional unevenness of the diameter of the intermediate portion 24 of the shaft 16 is taken into consideration.

The dimension of the magnet 12 of the rotor 10 according to the present invention, suitably used for a miniature electric motor incorporated in an electronic clock or watch, can be designed so that the outer diameter is in the range of 800 μm to 1500 μm , the inner diameter is in the range of 250 μm to 500 μm , the axial length is in the range of 400 μm to 800 μm , and the plating thickness is in the range of 10 μm to 30 μm . When the dimension of the magnet 12 is selected in the above range, the above-described effects of the present invention can be obtained.

It should be noted that, in the above experiments, the dimension of the interference $d_1 - D_1$ between the intermediate portion 24 of the shaft 16 and the magnet 12 inside the through hole 20 can also be adjusted by modifying the thickness of the coating or metal plating 22, in place of modifying the diameter of the intermediate portion 24. Further, the bonding agent or filler, vacuum-impregnated in the permanent magnet material 18, may also be selected from a phenol resin, a

thermosetting adhesive such as a polyurethane, and an anaerobic adhesive, in place of the epoxy resin. Every one of these fillers is a liquid resinous material, capable of establishing relatively high adhesion force and easy handling, which results in similar effects.

Experiment 2

In the rotor 40 shown in Fig. 3, the permanent magnet material 18 was made of an anisotropic bond magnet of rare-earth elements, formed from a $\text{Sm}_2\text{Co}_{17}$ type magnetic powder and an epoxy resin binder, the shaft 16 was made of a carbon steel "JIS SK4", and the coating 42 included a Ni-P electroless plating base layer 44 and a Ni electroplating top layer 46. The shaft 16 had a monolithic or integral body including the toothed wheel 28. The annular or cylindrical permanent magnet material 18 was dimensioned as $1250\text{ }\mu\text{m}$ (outer diameter) \times $350\text{ }\mu\text{m}$ (inner diameter) \times $488\text{ }\mu\text{m}$ (axial length). The bonded magnet used for the permanent magnet material 18 was produced through a compression molding process in a magnetic field, from a compound including the $\text{Sm}_2\text{Co}_{17}$ type magnetic powder having the average particle diameter of $10\text{ }\mu\text{m}$ (measured by a Fischer's method) and the epoxy resin binder of 3 weight%. This bonded magnet included air cavities of 20 to 40 volume%.

Then, the magnet material 18 was vacuum-impregnated with a thermosetting liquid epoxy resin to fill the air cavities, so as to enhance the mechanical strength and the toughness of the magnet material 18. To further improve the mechanical strength, the Ni-P electroless plating base layer 44 having a uniform thickness of $1\text{ }\mu\text{m}$ was formed on the entire surface of the permanent magnet material 18, and the Ni electroplating top layer 46 having a uniform thickness of $5\text{ }\mu\text{m}$ was formed on the entire surface of the base layer 44. Thereby, the magnet 12, in which the inner diameter D_2 inside the

through hole 20 was $338\text{ }\mu\text{m}$ and the entire axial length T_2 of the through hole 20 was $500\text{ }\mu\text{m}$, was completed. The magnet 12 thus formed had a extreme breaking strength against a compression load in a radial direction, which was ten times, and more, that of the permanent magnet material 18. Note, if the double-layered metal plating 42 tends to be provided with uneven thickness, it may be useful that the metal plating 42 is formed so as to have a minimum thickness $6\text{ }\mu\text{m}$, and that the through hole 20 is finished on such a plated magnet blank by using a $338\text{ }\mu\text{m}$ diameter drill.

Six types of the shaft 16 were provided, which respectively included the intermediate portions 24 having the diameter d_2 of $340\text{ }\mu\text{m}$, $343\text{ }\mu\text{m}$, $348\text{ }\mu\text{m}$, $358\text{ }\mu\text{m}$, $368\text{ }\mu\text{m}$ and $373\text{ }\mu\text{m}$. Then, the shafts 16 were respectively inserted into the magnet 12 thus completed, and the intermediate portions 24 of the shafts 16 were respectively press-fitted into the through hole 20, until the respective axial interengagement lengths t_2 of $10\text{ }\mu\text{m}$, $30\text{ }\mu\text{m}$, $50\text{ }\mu\text{m}$, $100\text{ }\mu\text{m}$, $200\text{ }\mu\text{m}$, $250\text{ }\mu\text{m}$ and $300\text{ }\mu\text{m}$ were obtained. In this way, the six types of the shafts 16 were respectively secured to the magnet 12, under the deformation of the magnet 12 especially in the wall of the metal plating 42 inside the through hole 20, in different engagement conditions (the interference " $d_2 - (\text{minus}) D_2$ "; the axial interengagement length t_2).

For the respective types of rotors 40 thus provided, the fixing force (Kgf) for securing the respective shafts 16 (Table 4), the respective breaking states of the magnet 12 (Table 5) and the tilt or misalignment of the respective shafts 16 (Table 6) were estimated. The fixing force was determined by axially pushing the first end portion 26 of the shaft 16 secured in the through hole 20 of the magnet 12 and measuring the force required to shift the shaft 16 in the through hole 20 (or to pull

the shaft out from the through hole 20). The results of these estimations are shown in the Tables 4 to 6.

Table 4 (Fixing Force: Kgf)

$d_2 - D_2$ (μm) \ t_2 (μm)	2	5	10	20	30	35
10	0.02	0.05	0.11	0.64	0.99	2.29
30	0.06	0.09	0.13	0.95	1.86	-
50	0.09	0.25	0.93	1.40	2.03	-
100	0.12	<u>0.39</u>	<u>1.45</u>	<u>2.42</u>	<u>2.91</u>	-
200	0.15	<u>0.67</u>	<u>1.60</u>	<u>2.90</u>	<u>3.60</u>	-
250	0.19	<u>0.91</u>	<u>2.52</u>	<u>2.92</u>	<u>3.99</u>	-
300	0.02	-	-	-	-	-

(-: less than 0.01 Kgf)

Table 5 (Breaking of Magnet)

$d_2 - D_2$ (μm) \ t_2 (μm)	2	5	10	20	30	35
10	○	○	○	○	○	○
30	○	○	○	○	○	×
50	○	○	○	○	○	×
100	○	<u>○</u>	<u>○</u>	<u>○</u>	<u>○</u>	×
200	○	<u>○</u>	<u>○</u>	<u>○</u>	<u>○</u>	×
50	○	<u>○</u>	<u>○</u>	<u>○</u>	<u>○</u>	×
300	×	×	×	×	×	×

(○: unbroken ×: broken)

Table 6 (Misalignment of Shaft)

$d_2 - D_2$ (μm) \ t_2 (μm)	2	5	10	20	30	35
10	×	×	×	×	×	×
30	×	×	×	×	×	-
50	×	×	×	×	×	-
100	○	○	○	○	○	-
200	○	○	○	○	○	-
250	○	○	○	○	○	-
300	-	-	-	-	-	-

(○: aligned ×: misaligned -: unestimated (broken))

As will be understood from the results of the above estimations, when the interference $d_2 - D_2$ between the intermediate portion 24 of the shaft 16 and the magnet 12 inside the through hole 20 was less than $5 \mu\text{m}$, the fixing force of 0.2 Kgf, which is generally required for the rotor of a miniature electric motor incorporated in an electronic clock or watch, could not be obtained. When the interference exceeded $30 \mu\text{m}$, the magnet 12 was broken in most cases of the axial interengagement lengths t_2 , during the press-fitting operation of the shaft 16 into the through hole 20. When the axial interengagement length t_2 was less than $100 \mu\text{m}$, the shaft 16 was tilted or misaligned in the through hole 20. When the axial interengagement length t_2 exceeded $250 \mu\text{m}$, the magnet 12 was broken in every case of the interferences $d_2 - D_2$, during the press-fitting operation of the shaft 16. Consequently, it is required to select the axial interengagement length t_2 in the range of $100 \mu\text{m}$ to

250 μm (i.e., $T_2/5 \leq t_2 \leq T_2/2$), and also to select the interference $d_2 - D_2$ in the range of 5 μm to 30 μm .

As is apparent from the above, the rotors 40, having the estimated results underlined in the respective tables 4 to 6, are adoptable for the invention, wherein the magnet 12 is prevented from being broken or cracked due to the shaft 16, wherein the desired fixing force of at least 0.2 Kgf is obtained, and wherein the tilt or misalignment of the shaft 16 is eliminated. By selecting any of the underlined sample rotors 40, the rotor 40 can be assembled by mass-production by a simple press-fitting process of the shaft 16 into the through hole 20, even when the dimensional unevenness of the diameter of the intermediate portion 24 of the shaft 16 is taken into consideration.

The dimension of the magnet 12 of the rotor 40 according to the present invention, suitably used for a miniature electric motor incorporated in an electronic clock or watch, can be designed so that the outer diameter is in a range of 800 μm to 1500 μm , the inner diameter is in a range of 250 μm to 500 μm , the axial length is in a range of 400 μm to 800 μm , and the double-layered plating thickness is in a range of 3 μm to 30 μm . When the dimension of the magnet 12 is selected in the above range, the above-described effects of the present invention can be obtained. When the double-layered plating thickness is 5 μm , generally the same results as in the rotor 10 having the single-layered plating thickness of 20 μm , was obtained. The coating thickness of such a relatively thinner double-layered plating 42 can be easily controlled.

It should be noted that, in the above experiments, the dimension of the interference $d_2 - D_2$ between the intermediate portion 24 of the shaft 16 and the magnet 12 inside the through hole 20 can also be adjusted by

modifying the thickness of the coating or metal plating 42, in place of modifying the diameter of the intermediate portion 24. Further, the bonding agent or filler, vacuum-impregnated in the permanent magnet material 18, may also be selected from a phenol resin, a thermosetting adhesive such as a polyurethane, and an anaerobic adhesive, in place of the epoxy resin. Every one of these fillers is a liquid resinous material capable of providing relatively high adhesion force and easy handling, and which results in similar effects.

Figs. 4 and 5 show a rotor 50 of a miniature electric motor, according to a third embodiment of the present invention. The rotor 50 of this embodiment is provided with a structure essentially similar to the structure of the above-mentioned rotor 10, except for the structure of reinforcing means. Therefore, same or similar components are denoted by common reference numerals, and the detailed description thereof are not repeated.

The magnet 12 of the rotor 50 has no coating and is structured from the annular or cylindrical permanent magnet material 18. Accordingly, the surface of the permanent magnet material 18 defines the center cylindrical through hole 20 extending coaxially with the rotation axis 14, and also the inner cylindrical surface of the magnet 12 inside the through hole 20 having a diameter " D_3 ".

The shaft 16 of the rotor 50 includes the intermediate portion 24 with a diameter " d_3 ". The diameter d_3 is selected so that the intermediate portion 24 is received and somewhat loosely press-fitted or fitted into the through hole 20 of the magnet 12 (i.e., d_3 is slightly larger than D_3). The first end portion 26 of the shaft 16 has a diameter " e_3 " smaller than the diameter D_3 of the through hole 20.

The intermediate portion 24 and the first end portion 26 of the shaft 16 are inserted into the through

hole 20, and the shaft 16 is concentrically supported at a predetermined proper position on the magnet 12, due to the interengagement of the outer cylindrical surface of the intermediate portion 24 with the inner cylindrical surface of the magnet 12 inside the through hole 20. In this respect, the intermediate portion 24 is dimensioned so as to define the axial interengagement length " t_3 " shorter than the entire axial length " T_3 " of the through hole 20.

The rotor 50 also includes reinforcing means provided at least inside the through hole 20 of the magnet 12, for ensuring a fixing force to securely hold the shaft 16 in the predetermined position on the magnet 12. In this embodiment, the reinforcing means is structured by an adhesive 52 filled in a clearance defined between the first end portion 26 of the shaft 16 and the magnet 12 inside the through hole 20. The intermediate portion 24 of the shaft 16 is somewhat loosely engaged with the inner cylindrical surface of the magnet 12 in a face-to-face manner, and the adhesive 52 filled in the clearance defined in the through hole 20 serves to securely fix the shaft 16 inside the through hole 20, so as to establish the desired fixing force.

In this structure, the intermediate portion 24 of the shaft 16 is somewhat loosely press-fitted and temporarily attached into the through hole 20 of the magnet 12, so that the magnet 12 is prevented from being broken or cracked, during the press-fitting operation of the portion 24 into the through hole 20 and after the rotor 50 is completed. Then the relatively large and stable fixing force for the shaft 16 is ensured by the adhesive 52. The adhesive 52 is easily and surely filled in the clearance defined between the first end portion 26 of the shaft 16 and the magnet 12 inside the through hole 20 by, e.g., a vacuum-impregnating process, after the insertion of the shaft 16 into the through hole 20. Also, an additional part such as a bush is not used,

which can reduce the number of parts of the rotor 50. Therefore, the rotor 50 can be produced with a high structural reliability, a high yield and a relatively low cost.

5 By suitably adjusting the axial interengagement length t_3 of the intermediate portion 24 of the shaft 16 with relation to the entire axial length T_3 of the through hole 20, as well as an interference " d_3 minus D_3 " between the intermediate portion 24 and the magnet 12 in
10 the through hole 20, the concentricity or alignment of the shaft 16 relative to the magnet 12 can be obtained while eliminating the breaking or cracking of the magnet 12. Also, by suitably adjusting an axial adhesion length " T_3 minus t_3 " and a radial adhesion length " D_3
15 minus e_3 " of the clearance defined between the first end portion 26 of the shaft 16 and the magnet 12 inside the through hole 20, which are occupied by the adhesive 52, the desired stable fixing force for the shaft 16 can be obtained. This structure can be applied to both the
20 sintered magnet structure and the bonded magnet structure.

It should be noted that the desired fixing force is determined in consideration of the productivity and the structural reliability of the rotor 50, and is, for
25 example, 0.2 Kgf. Also, it should be noted that the intermediate portion 24 of the shaft 16 may have a deformed profile such as a prism, as described in the aforementioned JP-U-54-71610.

In the rotor 50, it is preferred that a dimensional
30 relationship between the axial interengagement length t_3 of the intermediate portion 24 of the shaft 16 and the entire axial length T_3 of the through hole 20 of the magnet 12 is defined as $T_3/5 \leq t_3 \leq 4T_3/5$. If the axial interengagement length t_3 is less than $T_3/5$, the shaft 16
35 would be easily tilted in the through hole 20, which results in a misalignment of the shaft 16 during the press-fitting operation of the shaft 16. If the axial

interengagement length t_3 is more than $4T_3/5$, the axial adhesion length " $T_3 - (\text{minus}) t_3$ " would be shortened, which results in the difficulty for ensuring the desired stable fixing force for the shaft 16.

5 It is preferred, in the rotor 50, that the axial adhesion length " $T_3 - t_3$ " is at least $50 \mu\text{m}$, so as to ensure the desired stable fixing force for the shaft 16, and to permit the adhesive 52 to be held in the clearance defined inside the through hole 20 during a washing
10 process described below. It is also preferred that the radial adhesion length " $D_3 - (\text{minus}) e_3$ " is at least $2 \mu\text{m}$, so as to ensure the desired stable fixing force for the shaft 16, and to permit the adhesive 52 to be easily filled in the clearance.

15 A surplus adhesive adhered on the outer surface of the magnet 12 outside the through hole 20, during the vacuum-impregnating process, can be readily removed and washed by an organic solvent, while keeping the adhesive 52 in the clearance inside the through hole 20.
20 The vacuum-impregnating process for filling the clearance with the adhesive 52 makes it possible for a large number of (for example, ten thousand to million) rotors 50 to be processed all together at once, which is known as batch processing. Consequently, the production cost for the
25 rotor 50 can be further reduced.

 The adhesive 52 is preferably made of a thermosetting epoxy resin, since it has a relatively high adhesion force and ensures a stable productivity. That
30 is, the wide pot life and the viscosity of the thermosetting epoxy resin can suitably and optionally adjusted at room temperature. The viscosity of the epoxy resin is preferred to be as low as possible, and the pot life at ordinary temperature is preferred to be as long as possible in view of the productivity.

35 Fig. 6 shows a rotor 60 of a miniature electric motor, according to a fourth embodiment of the present

invention. The rotor 60 of this embodiment is provided with a structure essentially similar to the structure of the above-mentioned rotor 50, except that a coating 62 is formed on the magnet material 18. Therefore, same or
5 similar components are denoted by common reference numerals, and detailed descriptions thereof are not repeated.

In the rotor 60, the magnet 12 is structured by the permanent magnet material 18 and the coating 62 formed on
10 the entire surface of the permanent magnet material 18. Accordingly, the surface of the coating 62 defines the center cylindrical through hole 20 extending coaxially with the rotation axis 14, and also the inner cylindrical surface of the magnet 12 inside the through hole 20
15 having a diameter " D_4 ".

The intermediate portion 24 of the shaft 16 has a diameter " d_4 " which is selected so that the intermediate portion 24 is received and somewhat loosely press-fitted or fitted into the through hole 20 of the magnet 12
20 (i.e., d_4 is slightly larger than D_4). The first end portion 26 of the shaft 16 has a diameter " e_4 " smaller than the diameter D_4 of the through hole 20. Also, the intermediate portion 24 of the shaft 16 is dimensioned so as to define the axial interengagement length " t_4 "
25 shorter than the entire axial length " T_4 " of the through hole 20.

The coating 62 serves as additional reinforcing means, cooperating with the adhesive 52 filled in the clearance defined between the first end portion 26 of the
30 shaft 16 and the magnet 12 inside the through hole 20, for ensuring fixing force to securely hold the shaft 16 in the predetermined position on the magnet 12. That is, although the intermediate portion 24 of the shaft 16 is somewhat loosely engaged with the inner cylindrical
35 surface of the magnet 12 in a face-to-face manner, the coating 62 serves to enhance the mechanical strength of the permanent magnet material 18, so as to effectively

prevent the latter being broken or cracked due to the insertion of the shaft 16. Accordingly, this structure is especially suitable for a case wherein the permanent magnet material 18 is made of a relatively fragile magnet, such as a bonded magnet. In this case, the coating 62 also serves to prevent the magnetic powder from falling from the molded permanent magnet material 18 during the press-fitting operation of the shaft 16.

The coating 62 may be made of a metal plating. The metal plating 62 is preferably made of a Ni-P or Ni-P-W type electroless plating, to provide a generally uniform thickness over the entire surface of the permanent magnet material 18. Also, the metal plating 62 has preferably the thickness of at least 10 μm , to ensure the sufficient improvement of the mechanical strength of the magnet 12. Alternatively, in the rotor 60, the coating 62 may be made of an organic substance layer, since the intermediate portion 24 of the shaft 16 is somewhat loosely press-fitted in the through hole 20 of the magnet 12. In this arrangement, the organic substance layer 62 is preferably made of a sprayed coat of epoxy resin, a deposited coat of poly-para-xylene, an electro-deposition coating, etc. Also, the organic substance layer 62 has preferably the thickness of at least 20 μm , to ensure the sufficient improvement of the mechanical strength of the magnet 12.

The constitutions and the characteristic effects of the third and fourth embodiments of the present invention will be more clearly described below, with reference to the results of some experiments for the validity of the invention.

Experiment 3

In the rotor 50 shown in Fig. 4 and 5, the permanent magnet material 18 was made of a $\text{Sm}_2\text{Co}_{17}$ type sintered magnet, and the shaft 16 was made of a carbon steel "JIS SK4". The annular or cylindrical permanent magnet

material 18, i.e., the magnet 12, was dimensioned as
1250 μm (outer diameter) \times 350 μm (inner diameter: D_3) \times
500 μm (axial length: T_3).

Three types of the shaft 16 were provided, which
5 respectively included the intermediate portions 24 having
the diameter d_3 of 350 μm , 355 μm and 360 μm . These
shafts 16 also included the first end portions 26 having
the diameter e_3 of 330 μm . Then, the shafts 16 were
respectively inserted into the magnet 12, and the
10 intermediate portions 24 of the shafts 16 were
respectively press-fitted into the through hole 20, until
the respective axial interengagement lengths t_3 of 50 μm ,
70 μm , 100 μm , 200 μm , 300 μm , 400 μm , 420 μm and 450 μm
were obtained. In this way, the three types of shafts 16
15 were respectively temporarily attached to the magnet 12,
under the uniform contact of the entire outer surface of
the intermediate portion 24 with the inner surface of the
magnet 12 inside the through hole 20, in different
engagement conditions (the interference " $d_3 - D_3$ "; the
20 axial interengagement length t_3) (a first step).

For the respective types of rotor blanks thus
provided, the fixing force (Kgf) for securing the
respective shafts 16 or the attaching states of the
shafts 16 were estimated. The fixing force was
25 determined by axially pushing the first end portion 26 of
the shaft 16 secured in the through hole 20 of the
magnet 12 and measuring the force required to shift the
shaft 16 in the through hole 20 (or to pull the shaft
from the through hole 20). The results of this
30 estimation are shown in Table 7.

Table 7 (Fixing Force (Kgf) or Attaching State: First Step)

$d_3 - D_3$ (μm) \ t_3 (μm)	0	5	10
50	I	I	I
70	I	I	I
100	II	0.02	III
200	II	0.05	III
300	0.02	0.07	III
400	0.04	0.13	III
420	0.04	0.15	III
450	0.05	0.16	III

(I: misaligned II: fell out III: broken)

As shown in the table 7, after the first step, when the axial interengagement length t_3 was less than 100 μm , all the shafts 16 were tilted or misaligned in the through hole 20. When the interference $d_3 - D_3$ between the intermediate portion 24 of the shaft 16 and the magnet 12 inside the through hole 20 was 0 μm and the axial interengagement length t_3 was at most 200 μm , the misalignment did not occur, but the shaft 16 tended to fall out the through hole 20 during a handling before a second step described below. When the interference $d_3 - D_3$ was 10 μm (the diameter d_3 of the intermediate portion 24 was 360 μm), the magnet 12 tended to be broken in certain cases of the axial interengagement lengths t_3 , during the press-fitting operation of the shaft 16. In the other engagement conditions ($d_3 - D_3$; t_3), the shafts 16 could be temporarily attached on the magnet 12 without causing the misalignment of the shaft 16 and the breaking of the magnet 12.

Then, a large number of (e.g., approximately a

million) rotor blanks, to which the shafts 16 are temporarily attached under the above different engagement conditions after the first step, were provided, and put in a beaker of 1 liter. The beaker was then evacuated in
5 a vacuum container up to 0.1 Torr. During this state, a thermosetting liquid epoxy resin, which serves as the adhesive 52, was provided in the beaker, and after that, the vacuum was released to an atmospheric pressure. After the vacuum was released, the beaker may be housed
10 in a pressure container, to be subjected to pressure in a range of 3 Kg/cm² to 5 Kg/cm². Thereafter, all the rotor blanks were transferred into a stainless-steel mesh container, while the most of the liquid epoxy resin was poured out. The reminder of the epoxy resin was washed
15 out in ethanol, so as to prevent the rotor blanks from being stuck together. The washing process may be carried out by an ultrasonic cleaning, which can shorten a time required for washing. Then, the epoxy resin was cured under the condition of 180°C for three hours. Thereby,
20 the shafts 16 were fixed on the magnets 20 under the different conditions ($d_3 - D_3$; t_3), to complete the plural types of rotors 50 (a second step).

For the respective types of rotors 50 thus completed, the fixing force (Kgf) for securing the
25 respective shafts 16 or the attaching states of the shafts 16 were estimated, in the same manner as in the former estimation after first step. The results of this estimation are shown in Table 8.

Table 8 (Fixing Force (Kgf) or Attaching State: Second Step)

$d_3 - D_3$ (μm) \ t_3 (μm)	0	5	10
50	I	I	I
70	I	I	I
100	II	<u>0.25</u>	III
200	II	<u>0.85</u>	III
300	0.18	<u>0.84</u>	III
400	0.15	<u>0.54</u>	III
420	0.09	0.17	III
450	0.07	0.17	III

(I: misaligned II: fell out III: broken)

As shown in the table 8, after the second step, when the axial interengagement length t_3 was in a range of 100 μm to 400 μm , the desired fixing force of at least 0.2 Kgf could be obtained. However, when the axial interengagement length t_3 exceeded 400 μm , the fixing force became lower than 0.2 Kgf, and the adhesive 52 was not considered to effectively function.

As will be understood from the results of the above estimations, the rotors 50, having the estimated results underlined in the table 8, provided with the axial interengagement length t_3 in the range of 100 μm to 400 μm (i.e., $T_3/5 \leq t_3 \leq 4T_3/5$), are preferably adoptable for the invention, wherein the magnet 12 is prevented from being broken or cracked due to the shaft 16, wherein the desired fixing force of at least 0.2 Kgf is obtained, and wherein the misalignment or the falling out of the shaft 16 is eliminated. Such a rotor 50 is suitably used for a miniature electric motor incorporated in an electronic clock or watch.

It should be noted that, in the above experiments, the permanent magnet material 18 may also be formed from SmCo_5 type sintered magnet or NdFeB type sintered magnet, in place of the $\text{Sm}_2\text{Co}_{17}$ type sintered magnet, which results in the similar effects.

Experiment 4

In the rotor 60 shown in Fig. 6, the permanent magnet material 18 was made of a $\text{Sm}_2\text{Co}_{17}$ type bonded magnet, which included an epoxy resin type binder, and the shaft 16 was made of a carbon steel "JIS SK4". The annular or cylindrical permanent magnet material 18 was dimensioned as $1250\text{ }\mu\text{m}$ (outer diameter) \times $350\text{ }\mu\text{m}$ (inner diameter) \times $500\text{ }\mu\text{m}$ (axial length). The coating 62 is made of a Ni-P electroless plating having a coating thickness of $15\text{ }\mu\text{m}$. Accordingly, the inner diameter D_4 of the rotor 12 is $320\text{ }\mu\text{m}$, and the entire axial length T_4 of the through hole 20 is $530\text{ }\mu\text{m}$.

Three types of the shaft 16 were provided, which respectively included the intermediate portions 24 having the diameter d_4 of $320\text{ }\mu\text{m}$, $325\text{ }\mu\text{m}$ and $330\text{ }\mu\text{m}$. These shafts 16 also included the first end portions 26 having the diameter e_4 of $300\text{ }\mu\text{m}$. Then, the shafts 16 were respectively inserted into the magnet 12, and the intermediate portions 24 of the shafts 16 were respectively press-fitted into the through hole 20, until the respective axial interengagement lengths t_4 of $70\text{ }\mu\text{m}$, $90\text{ }\mu\text{m}$, $120\text{ }\mu\text{m}$, $220\text{ }\mu\text{m}$, $320\text{ }\mu\text{m}$, $420\text{ }\mu\text{m}$, $440\text{ }\mu\text{m}$ and $470\text{ }\mu\text{m}$ were obtained. In this way, the three types of shafts 16 were temporarily attached to the magnet 12 under the uniform contact of the entire outer surface of the intermediate portion 24 with the inner surface of the magnet 12 inside the through hole 20, in different engagement conditions (the interference " $d_4 - D_4$ "; the axial interengagement length t_4) (a first step).

For the respective types of rotor blanks thus provided, the fixing force (Kgf) for securing the respective shafts 16 or the attaching states of the shafts 16 were estimated. The fixing force was
 5 determined by axially pushing the first end portion 26 of the shaft 16 secured in the through hole 20 of the magnet 12 and measuring the force required to shift the shaft 16 in the through hole 20 (or to pull out the shaft from the through hole 20). The results of this
 10 estimation are shown in Table 9.

Table 9 (Fixing Force (Kgf) or Attaching State: First Step)

$d_4 - D_4$ (μm)	0	5	10
t_4 (μm)			
70	I	I	I
90	I	I	I
120	II	0.04	III
220	II	0.05	III
320	II	0.09	III
420	0.03	0.13	III
440	0.05	0.14	III
470	0.05	0.15	III

(I: misaligned II: fell out III: broken)

As shown in the table 9, after the first step, when the axial interengagement length t_4 was less than 100 μm ,
 15 all the shafts 16 were tilted or misaligned in the through hole 20. When the interference $d_4 - D_4$ between the intermediate portion 24 of the shaft 16 and the magnet 12 inside the through hole 20 was 0 μm and the axial interengagement length t_4 was at most 320 μm , the
 20 misalignment did not occur, but the shaft 16 tended to fall out the through hole 20 during handling before a second step described below. When the interference

$d_4 - D_4$ was 10 μm (the diameter d_4 of the intermediate portion 24 was 330 μm), the magnet 12 tended to be broken in certain cases of the axial interengagement lengths t_4 , during the press-fitting operation of the shaft 16. In the other engagement conditions ($d_4 - D_4$; t_4), the shafts 16 could be temporarily attached to the magnet 12 without causing the misalignment of the shaft 16 and the breaking of the magnet 12.

Then, a large number of (e.g., approximately a million) rotor banks, to which the shafts 16 are temporarily attached under the above different engagement conditions after the first step, were provided, and put in a beaker of 1 liter. The beaker was then evacuated in a vacuum container up to 0.1 Torr. During this state, a thermosetting liquid epoxy resin, which serves as the adhesive 52, was provided in the beaker, and after that, the vacuum was released to an atmospheric pressure. After the vacuum was released, the beaker may be housed in a pressure container, to be subjected to pressure in a range of 3 Kg/cm^2 to 5 Kg/cm^2 . Thereafter, all the rotor blanks were transferred into a stainless-steel mesh container, while the most of the liquid epoxy resin was poured out. The remainder of the epoxy resin was washed out in ethanol, so as to prevent the rotor blanks from being stuck together. The washing process may be carried out by an ultrasonic cleaning, which can shorten the time required for washing. Then, the epoxy resin is cured under the condition of 180°C for three hours. Thereby, the shafts 16 were fixed on the magnets 20 under the different conditions ($d_4 - D_4$; t_4), to complete the plural types of rotors 60 (a second step).

For the respective types of rotors 60 thus completed, the fixing force (Kgf) for securing the respective shafts 16 or the attaching states of the shafts 16 were estimated, in the same manner as in the former estimation after the first step. The results of

this estimation is shown in Table 10.

Table 10 (Fixing Force (Kgf) or Attaching State: Second Step)

$d_4 - D_4$ (μm) t_4 (μm)	0	5	10
70	I	I	I
90	I	I	I
120	II	<u>0.28</u>	III
220	II	<u>0.78</u>	III
320	II	<u>0.76</u>	III
420	0.14	<u>0.45</u>	III
440	0.10	0.16	III
470	0.08	0.17	III

(I: misaligned II: fell out III: broken)

As shown in the table 10, after the second step,
5 when the axial interengagement length t_4 was in a range
of 120 μm to 420 μm , the desired fixing force of at least
0.2 Kgf could be obtained. However, when the axial
interengagement length t_4 exceeded 420 μm , the fixing
force became lower than 0.2 Kgf, and the adhesive 52 was
10 not considered to effectively function.

As will be understood from the results of the above
estimations, the rotors 60, having the estimated results
underlined in the table 10, provided with the axial
interengagement length t_4 in the range of 106 μm to
15 424 μm (i.e., $T_4/5 \leq t_4 \leq 4T_4/5$), are preferably adoptable
for the invention, wherein the magnet 12 is prevented
from being broken or cracked due to the shaft 16, wherein
the desired fixing force of at least 0.2 Kgf is obtained,
and wherein the misalignment or the falling out of the
20 shaft 16 is eliminated. Such a rotor 60 is suitably used
for a miniature electric motor incorporated in an

electronic clock or watch.

It should be noted that, in the above experiments, the permanent magnet material 18 may also be formed from SmCO_5 type bonded magnet, NdFeB type bonded magnet, or SmFeN type bonded magnet, in place of the $\text{Sm}_2\text{Co}_{17}$ type bonded magnet, which results in the similar effects. Further, in the above experiments, the coating 62 may also be formed from a deposited coat of poly-para-xylene having a coating thickness of $25\text{ }\mu\text{m}$, as an organic substance layer which results in the similar effects.

While the invention has been described with reference to preferred embodiments thereof, various changes and modifications may be made for the present invention within the disclosure of the following claims.

INDUSTRIAL APPLICABILITY

The present invention provides a rotor for use in a miniature electric motor, which has a high structural reliability and can be produced with a high yield and a relatively low cost. The rotor of the present invention, designed to include an annular or cylindrical magnet and a shaft fixed to the magnet, can prevent the magnet from being broken or cracked due to the shaft, and can ensure large and stable fixing force for securing the shaft in a predetermined position on the magnet. Accordingly, it can be suitably adopted for a rotor having a relatively fragile magnet, such as a simply molded or bonded magnet.

CLAIMS

1. A rotor for an electric motor, comprising:
a magnet having a rotation axis, said magnet being provided with a through hole extending coaxially with said rotation axis;
a shaft fixed concentrically to said magnet, said shaft including a portion fitted in said through hole, said portion having an axial interengagement length shorter than an axial length of said through hole; and
reinforcing means provided at least inside said through hole for ensuring a fixing force to securely hold said shaft in a predetermined position in said magnet.
2. A rotor as set forth in claim 1, wherein said magnet comprises an annular magnet material and a coating formed on a surface of said magnet material at least inside said through hole, and wherein said reinforcing means comprises said coating, said portion of said shaft being engaged with said coating in a face-to-face manner.
3. A rotor as set forth in claim 2, wherein said coating is made of a metal plating.
4. A rotor as set forth in claim 3, wherein said metal plating is an electroless plating.
5. A rotor as set forth in claim 3, wherein said metal plating includes at least one of a Ni-P electroless plating, a Ni-B electroless plating and a Ni-P-W electroless plating.
6. A rotor as set forth in claim 3, wherein said metal plating has a thickness of at least 10 μm .
7. A rotor as set forth in claim 3, wherein said metal plating includes an electroless plating base layer and an electroplating top layer.
8. A rotor as set forth in claim 7, wherein said electroplating top layer is a Ni electroplating.
9. A rotor as set forth in claim 7, wherein said electroless plating base layer has a thickness in a range

of 0.5 μm to 2.0 μm .

10. A rotor as set forth in claim 7, wherein said electroplating top layer has a thickness of at least 3.0 μm .

5 11. A rotor as set forth in claim 3, wherein said magnet material is made of a bonded magnet material.

12. A rotor as set forth in claim 11, wherein a dimensional relationship between said axial interengagement length of said portion of said shaft and said axial length of said through hole is defined as
10 $T/5 \leq t \leq T/2$, in which "T" is said through hole axial length and "t" is said axial interengagement length.

13. A rotor as set forth in claim 11, wherein said portion of said shaft is tightly press-fitted in said
15 through hole of said magnet, and wherein an interference of said portion in said through hole is in a range of 5 μm to 30 μm .

14. A rotor as set forth in claim 11, wherein said bonded magnet material is vacuum-impregnated with a
20 bonding agent or filler.

15. A rotor as set forth in claim 1, wherein said reinforcing means comprises an adhesive filled in a clearance defined between a remainder of said shaft other than said portion and said magnet inside said through
25 hole.

16. A rotor as set forth in claim 15, wherein a dimensional relationship between said axial interengagement length of said portion of said shaft and said axial length of said through hole is defined as
30 $T/5 \leq t \leq 4T/5$, in which "T" is said through hole axial length and "t" is said axial interengagement length.

17. A rotor as set forth in claim 15, wherein said adhesive is made of a thermosetting epoxy resin.

18. A rotor as set forth in claim 15, wherein said
35 magnet comprises an annular magnet material and a coating formed on a surface of said magnet material at least

inside said through hole, and wherein said reinforcing means further comprises said coating, said portion of said shaft being engaged with said coating in a face-to-face manner.

5 19. A rotor as set forth in claim 18, wherein said coating is made of a metal plating.

20. A rotor as set forth in claim 18, wherein said coating is made of an organic substance layer.

10 21. A rotor as set forth in claim 18, wherein said magnet material is made of a bonded magnet material.

22. A rotor as set forth in claim 1, wherein said magnet contains rare-earth elements.

23. Method of producing a rotor for an electric motor, comprising the steps of:

15 forming a coating on a surface of an annular magnet material and thereby providing a magnet having a rotation axis and a through hole extending coaxially with said rotation axis, said coating being arranged at least inside said through hole;

20 providing a shaft including a portion capable of being fitted in said through hole; and

 inserting said shaft into said through hole of said magnet and tightly press-fitting said portion of said shaft in said through hole, until an axial interengagement length of said portion, shorter than an axial length of said through hole, is obtained.

25 24. A method as set forth in claim 23, wherein said magnet material is made of a bonded magnet material, wherein said coating is a metal plating, and further
30 including a step of vacuum-impregnating said bonded magnet material with an adhesive before said step of forming said coating.

35 25. A method as set forth in claim 23, wherein an interference of said portion in said through hole is adjusted by changing a thickness of said coating.

26. Method of producing a rotor for an electric motor, comprising the steps of:

providing a magnet having a rotation axis and a through hole extending coaxially with said rotation axis;

5 providing a shaft including a first portion capable of being fitted in said through hole and a second portion axially adjacent to said first portion for defining a clearance inside said through hole;

10 inserting said shaft into said through hole of said magnet and fitting said first portion of said shaft in said through hole, until an axial interengagement length of said first portion, shorter than an axial length of said through hole, is obtained; and

15 filling an adhesive in said clearance inside said through hole.

27. A method as set forth in claim 26, wherein said adhesive is vacuum-impregnated into said clearance.

20 28. A method as set forth in claim 26, wherein said magnet is made of an annular bonded magnet material, and further including a step of forming a coating on a surface of said bonded magnet material before said step of inserting said shaft.

ABSTRACT

A rotor (10) for a miniature electric motor includes a magnet (12) having a rotation axis (14) and a shaft (16) fixed concentrically to the magnet. The magnet (12) includes a through hole (20) extending coaxially with the rotation axis (14). The shaft (16) includes a portion (24) fitted in the through hole (20). The portion (24) has an axial interengagement length (t_1) shorter than an axial length (T_1) of the through hole (20). The rotor (10) also includes reinforcing means provided at least inside the through hole (20). The magnet (12) comprises an annular magnet material (18), and a coating (22) formed on a surface of the magnet material and arranged at least inside the through hole (20). The reinforcing means is formed as the coating (22) of the magnet (12), and acts to ensure a fixing force to securely hold the shaft (16) in a predetermined position on the magnet.

Fig. 1

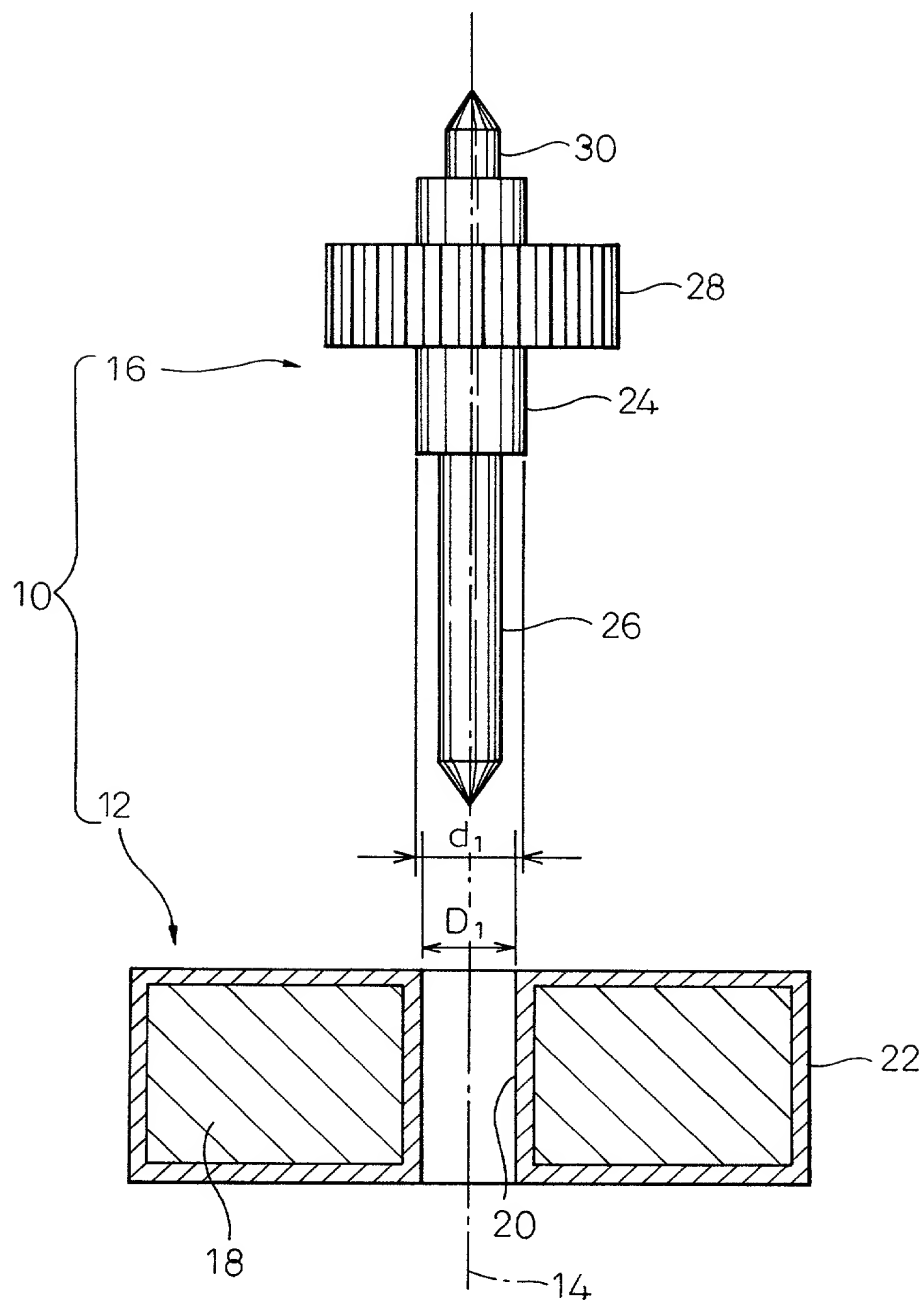


Fig. 2

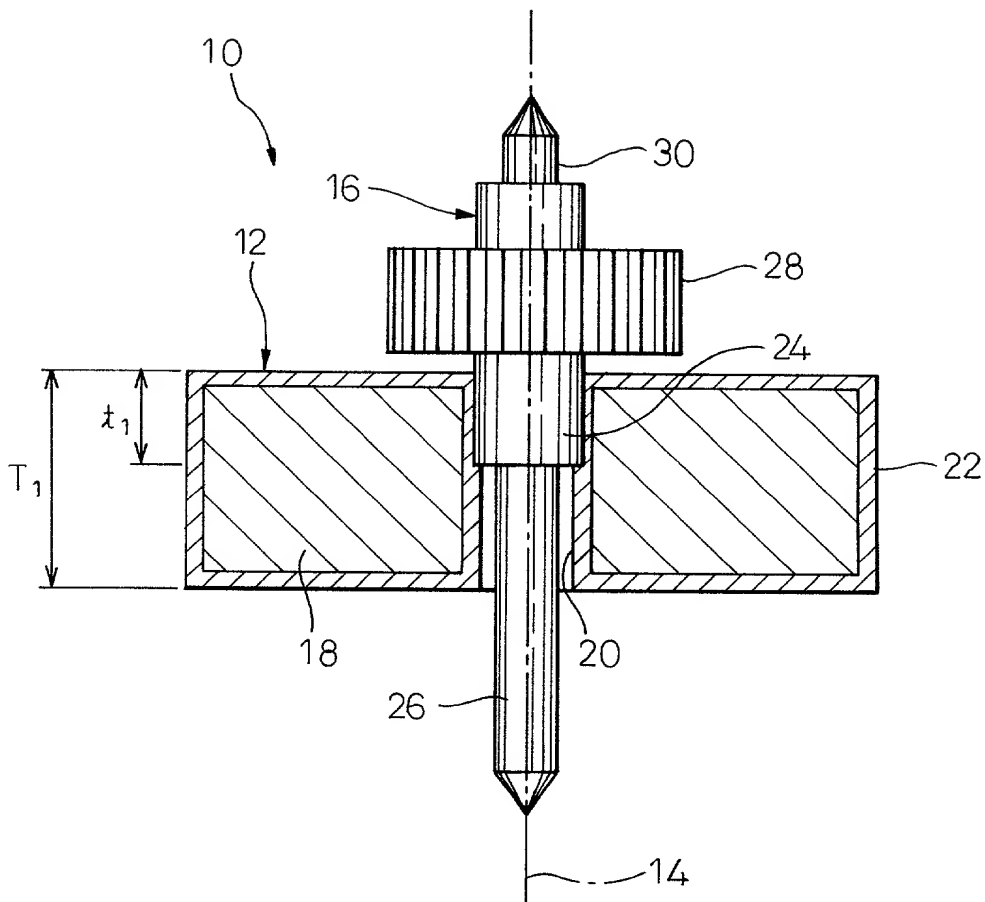


Fig. 3


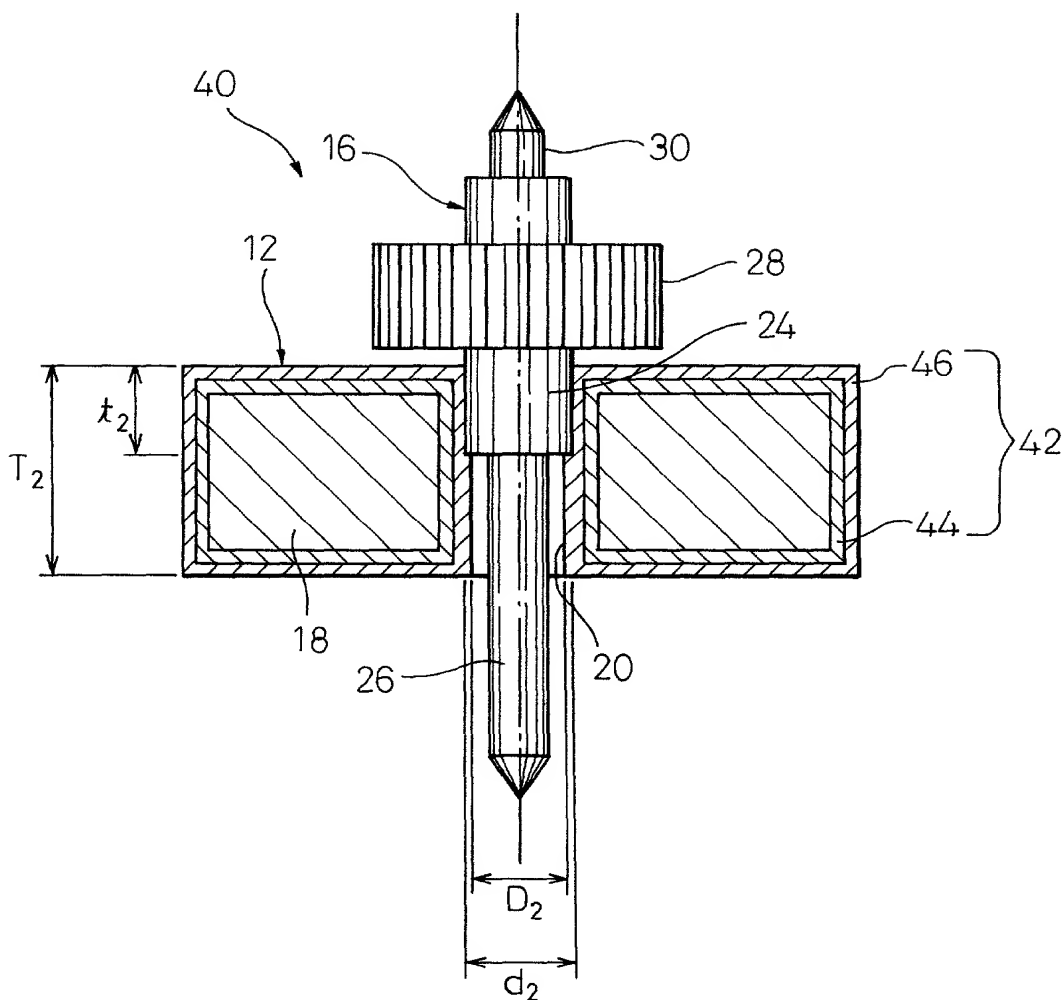


Fig. 4



Variable	Unit	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100																																																																																																																																																																																						
Population	Millions	10.0	10.1	10.2	10.3	10.4	10.5	10.6	10.7	10.8	10.9	11.0	11.1	11.2	11.3	11.4	11.5	11.6	11.7	11.8	11.9	12.0	12.1	12.2	12.3	12.4	12.5	12.6	12.7	12.8	12.9	13.0	13.1	13.2	13.3	13.4	13.5	13.6	13.7	13.8	13.9	14.0	14.1	14.2	14.3	14.4	14.5	14.6	14.7	14.8	14.9	15.0	15.1	15.2	15.3	15.4	15.5	15.6	15.7	15.8	15.9	16.0	16.1	16.2	16.3	16.4	16.5	16.6	16.7	16.8	16.9	17.0	17.1	17.2	17.3	17.4	17.5	17.6	17.7	17.8	17.9	18.0	18.1	18.2	18.3	18.4	18.5	18.6	18.7	18.8	18.9	19.0	19.1	19.2	19.3	19.4	19.5	19.6	19.7	19.8	19.9	20.0	20.1	20.2	20.3	20.4	20.5	20.6	20.7	20.8	20.9	21.0	21.1	21.2	21.3	21.4	21.5	21.6	21.7	21.8	21.9	22.0	22.1	22.2	22.3	22.4	22.5	22.6	22.7	22.8	22.9	23.0	23.1	23.2	23.3	23.4	23.5	23.6	23.7	23.8	23.9	24.0	24.1	24.2	24.3	24.4	24.5	24.6	24.7	24.8	24.9	25.0	25.1	25.2	25.3	25.4	25.5	25.6	25.7	25.8	25.9	26.0	26.1	26.2	26.3	26.4	26.5	26.6	26.7	26.8	26.9	27.0	27.1	27.2	27.3	27.4	27.5	27.6	27.7	27.8	27.9	28.0	28.1	28.2	28.3	28.4	28.5	28.6	28.7	28.8	28.9	29.0	29.1	29.2	29.3	29.4	29.5	29.6	29.7	29.8	29.9	30.0	30.1	30.2	30.3	30.4	30.5	30.6	30.7	30.8	30.9	31.0	31.1	31.2	31.3	31.4	31.5	31.6	31.7	31.8	31.9	32.0	32.1	32.2	32.3	32.4	32.5	32.6	32.7	32.8	32.9	33.0	33.1	33.2	33.3	33.4	33.5	33.6	33.7	33.8	33.9	34.0	34.1	34.2	34.3	34.4	34.5	34.6	34.7	34.8	34.9	35.0	35.1	35.2	35.3	35.4	35.5	35.6	35.7	35.8	35.9	36.0	36.1	36.2	36.3	36.4	36.5	36.6	36.7	36.8	36.9	37.0	37.1	37.2	37.3	37.4	37.5	37.6	37.7	37.8	37.9	38.0	38.1	38.2	38.3	38.4	38.5	38.6	38.7	38.8	38.9	39.0	39.1	39.2

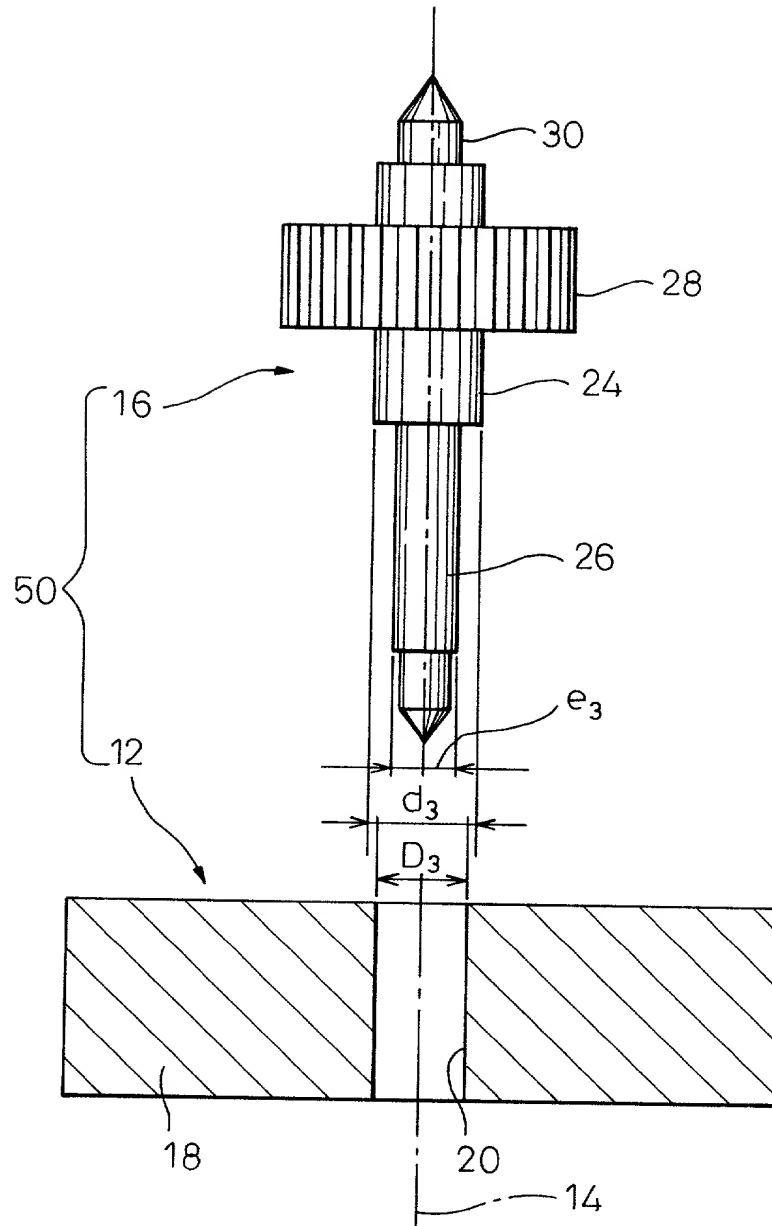

Variable	Mean	Standard deviation	Minimum	Maximum	Skewness	Kurtosis	Normality test
Age	34.5	10.5	20	65	0.15	3.2	0.98
Gender	0.5	0.5	0	1	0.0	3.0	0.99
Marital status	0.7	0.5	0	1	0.0	3.0	0.99
Education	12.5	2.5	9	16	0.1	3.1	0.98
Income	1500	500	500	3000	0.2	3.3	0.97
Health	0.8	0.4	0	1	0.0	3.0	0.99
Stress	0.6	0.5	0	1	0.0	3.0	0.99
Depression	0.4	0.5	0	1	0.0	3.0	0.99
Life satisfaction	0.7	0.5	0	1	0.0	3.0	0.99
Resilience	0.6	0.5	0	1	0.0	3.0	0.99
Optimism	0.7	0.5	0	1	0.0	3.0	0.99
Self-efficacy	0.6	0.5	0	1	0.0	3.0	0.99
Perceived stress	0.5	0.5	0	1	0.0	3.0	0.99
Life events	0.4	0.5	0	1	0.0	3.0	0.99
Health status	0.8	0.4	0	1	0.0	3.0	0.99
Stress management	0.6	0.5	0	1	0.0	3.0	0.99
Depression management	0.4	0.5	0	1	0.0	3.0	0.99
Life satisfaction management	0.7	0.5	0	1	0.0	3.0	0.99
Resilience management	0.6	0.5	0	1	0.0	3.0	0.99
Optimism management	0.7	0.5	0	1	0.0	3.0	0.99
Self-efficacy management	0.6	0.5	0	1	0.0	3.0	0.99
Perceived stress management	0.5	0.5	0	1	0.0	3.0	0.99
Life events management	0.4	0.5	0	1	0.0	3.0	0.99
Health status management	0.8	0.4	0	1	0.0	3.0	0.99
Stress management strategies	0.6	0.5	0	1	0.0	3.0	0.99
Depression management strategies	0.4	0.5	0	1	0.0	3.0	0.99
Life satisfaction management strategies	0.7	0.5	0	1	0.0	3.0	0.99
Resilience management strategies	0.6	0.5	0	1	0.0	3.0	0.99
Optimism management strategies	0.7	0.5	0	1	0.0	3.0	0.99
Self-efficacy management strategies	0.6	0.5	0	1	0.0	3.0	0.99
Perceived stress management strategies	0.5	0.5	0	1	0.0	3.0	0.99
Life events management strategies	0.4	0.5	0	1	0.0	3.0	0.99
Health status management strategies	0.8	0.4	0	1	0.0	3.0	0.99
Stress management strategies effectiveness	0.6	0.5	0	1	0.0	3.0	0.99
Depression management strategies effectiveness	0.4	0.5	0	1	0.0	3.0	0.99
Life satisfaction management strategies effectiveness	0.7	0.5	0	1	0.0	3.0	0.99
Resilience management strategies effectiveness	0.6	0.5	0	1	0.0	3.0	0.99
Optimism management strategies effectiveness	0.7	0.5	0	1	0.0	3.0	0.99
Self-efficacy management strategies effectiveness	0.6	0.5	0	1	0.0	3.0	0.99
Perceived stress management strategies effectiveness	0.5	0.5	0	1	0.0	3.0	0.99
Life events management strategies effectiveness	0.4	0.5	0	1	0.0	3.0	0.99
Health status management strategies effectiveness	0.8	0.4	0	1	0.0	3.0	0.99
Stress management strategies effectiveness	0.6	0.5	0	1	0.0	3.0	0.99
Depression management strategies effectiveness	0.4	0.5	0	1	0.0	3.0	0.99
Life satisfaction management strategies effectiveness	0.7	0.5	0	1	0.0	3.0	0.99
Resilience management strategies effectiveness	0.6	0.5	0	1	0.0	3.0	0.99
Optimism management strategies effectiveness	0.7	0.5	0	1	0.0	3.0	0.99
Self-efficacy management strategies effectiveness	0.6	0.5	0	1	0.0	3.0	0.99
Perceived stress management strategies effectiveness	0.5	0.5	0	1	0.0	3.0	0.99
Life events management strategies effectiveness	0.4	0.5	0	1	0.0	3.0	0.99
Health status management strategies effectiveness	0.8	0.4	0	1	0.0	3.0	0.99
Stress management strategies effectiveness	0.6	0.5	0	1	0.0	3.0	0.99</



Declaration and Power of Attorney For Patent Application**特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

ROTOR OF SMALL-SIZED MOTOR

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ __月__日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
(該当する場合) _____ に訂正されました。☐ was filed on April 23, 1999
as United States Application Number or
PCT International Application Number
PCT/JP99/02189 and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米 国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

外国での先行出願

10-113043 (Pat. Appln.) Japan

(Number)

(Country)

(番号)

(国名)

10-249376 (Pat. Appln.) Japan

(Number)

(Country)

(番号)

(国名)

23/April/1998

(Day/Month/Year Filed)

(出願年月日)

3/September/1998

(Day/Month/Year Filed)

(出願年月日)

Priority Not Claimed

優先権主張なし

私は、第35編米国法典119条(e)項に基づいて下記の米 国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米 国特許出願に記載された権利、又は米 国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米 国特許出願に開示されていない限り、その先行米 国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

委任状：私は、下記発明者として、以下の弁理士及び代理人、またはそのいずれかをここに選任し、本願の手続きを遂行すること並びにこれに関する一切の行為を米国特許商標庁に対して行うことを委任する。(代理人氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list agent's name(s) and registration number(s))

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, Reg. No. 22,540; Douglas B. Henderson, Reg. No. 20,291; Ford F. Farabow, Jr., Reg. No. 20,630; Arthur S. Garrett, Reg. No. 20,338; Donald R. Dunner, Reg. No. 19,073; Brian G. Brunsvold, Reg. No. 22,593; Tipton D. Jennings, IV, Reg. No. 20,645; Jerry D. Voight, Reg. No. 23,020; Laurence R. Hefter, Reg. No. 20,827; Kenneth E. Payne, Reg. No. 23,098; Herbert H. Mintz, Reg. No. 26,691; C. Larry O'Rourke, Reg. No. 26,014; Albert J. Santorelli, Reg. No. 22,610; Michael C. Eimer, Reg. No. 25,857; Richard H. Smith, Reg. No. 20,609; Stephen L. Peterson, Reg. No. 26,325; John M. Romary, Reg. No. 26,331; Bruce C. Zotter, Reg. No. 27,680; Dennis P. O'Reilly, Reg. No. 27,932; Allen M. Sokal, Reg. No. 26,695; Robert D. Bajefsky, Reg. No. 25,387; Richard L. Stroup, Reg. No. 28,478; David W. Hill, Reg. No. 28,220; Thomas L. Irving, Reg. No. 28,619; Charles E. Lipsey, Reg. No. 28,165; Thomas W. Winland, Reg. No. 27,605; Basil J. Lewis, Reg. No. 28,818; Martin I. Fuchs, Reg. No. 28,508; E. Robert Yoches, Reg. No. 30,120; Barry W. Graham, Reg. No. 29,924; Susan Haberman Griffen, Reg. No. 30,907; Richard B. Racine, Reg. No. 30,415; Thomas H. Jenkins, Reg. No. 30,857; Robert E. Converse, Jr., Reg. No. 27,432; Clair X. Mullen, Jr., Reg. No. 20,348; Christopher P. Foley, Reg. No. 31,354; John C. Paul, Reg. No. 30,413; Roger D. Taylor, Reg. No. 28,992; David M. Kelly, Reg. No. 30,953; Kenneth J. Meyers, Reg. No. 25,146; Carol P. Einaudi, Reg. No. 32,220; Walter Y. Boyd, Jr., Reg. No. 31,738; Steven M. Anzalone, Reg. No. 32,095; Jean B. Fordis, Reg. No. 32,984; Barbara C. McCurdy, Reg. No. 32,120; James K. Hammond, Reg. No. 31,964; Richard V. Burgujian, Reg. No. 31,744; J. Michael Jakes, Reg. No. 32,824; Thomas W. Banks, Reg. No. 32,719; M. Paul Barker, Reg. No. 32,013; Bryan C. Diner, Reg. No. 32,409; Christopher P. Isaac, Reg. No. 32,616; Andrew C. Sonu, Reg. No. 33,457; Dirk D. Thomas, Reg. No. 32,600

書類の送付先：

Send Correspondence to:

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, D.C. 20005-3315

直通電話連絡先：(名称及び電話番号)

Direct Telephone Calls to: (name and telephone number)

ARTHUR S. GARRETT
202-408-4091

唯一のまたは第一の発明者の氏名	1-00	Full name of sole or first inventor	Junji Sato
同発明者の署名	日付	Inventor's signature	Date
		Junji Sato	October 13, 2000
住所		Residence	
		Tokorozawa-shi, Saitama, Japan	JPX
国籍		Citizenship	
		Japanese	
郵便の宛先		Post Office Address	
		c/o CITIZEN WATCH CO., LTD., Technical Laboratory, 840, Aza Takeno, Oaza Shimotomi, Tokorozawa-shi, Saitama 359-8511, Japan	

第二の共同発明者の氏名 (該当する場合)	2-00	Full name of second joint inventor, if any	Eikichi Sashida
同第二発明者の署名	日付	Second inventor's signature	Date
		Eikichi Sashida	October 13, 2000
住所		Residence	
		Tanashi-shi, Tokyo, Japan	JPX
国籍		Citizenship	
		Japanese	
郵便の宛先		Post Office Address	
		c/o CITIZEN WATCH CO., LTD., Tanashi-Factory, 1-12, Honcho 6-chome, Tanashi-shi, Tokyo 188-8511, Japan	

(第三またはそれ以降の共同発明者に対しても同様な情報及び署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)

第三の共同発明者の氏名 (該当する場合)	3-00	Full name of third joint inventor, if any <u>Hideharu Miyauchi</u>
同第三発明者の署名	日付	Third inventor's signature <u>Hideharu Miyauchi</u> Date October 13, 2000
住所		Residence <u>Tanashi-shi, Tokyo, Japan</u> JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o CITIZEN WATCH CO., LTD., Tanashi Factory, 1-12, Honcho 6-chome, Tanashi-shi, Tokyo 188-8511, Japan

第四の共同発明者の氏名 (該当する場合)	4-00	Full name of fourth joint inventor, if any <u>Yousuke Sakakibara</u>
同第四発明者の署名	日付	Fourth inventor's signature <u>Yousuke Sakakibara</u> Date October 13, 2000
住所		Residence <u>Tokorozawa-shi, Saitama, Japan</u> JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o CITIZEN WATCH CO., LTD., Technical Laboratory, 840, Aza Takeno, Oaza Shimotomi, Tokorozawa-shi, Saitama 359-8511, Japan

第五の共同発明者の氏名 (該当する場合)	5-00	Full name of fifth joint inventor, if any <u>Hiroshi Ikeda</u>
同第五発明者の署名	日付	Fifth inventor's signature <u>Hiroshi Ikeda</u> Date October 13, 2000
住所		Residence <u>Tokorozawa-shi, Saitama, Japan</u> JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o CITIZEN WATCH CO., LTD., Technical Laboratory, 840, Aza Takeno, Oaza Shimotomi, Tokorozawa-shi, Saitama 359-8511, Japan

第六の共同発明者の氏名 (該当する場合)	6-00	Full name of sixth joint inventor, if any <u>Eigo Hashimoto</u> E.H.
同第六発明者の署名	日付	Sixth inventor's signature <u>Eigo Hashimoto</u> Date October 13, 2000
住所		Residence <u>Tokorozawa-shi, Saitama, Japan</u> JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o CITIZEN WATCH CO., LTD., Technical Laboratory, 840, Aza Takeno, Oaza Shimotomi, Tokorozawa-shi, Saitama 359-8511, Japan

(第七またはそれ以降の共同発明者に対しても同様な情報及び署名を提供すること。)

(Supply similar information and signature for seventh and subsequent joint inventors.)